

1. Recordable Event



3. WAP-PLUS



4. Router



5. Port 443



6. Firewall Secure Network




7. Send via Internet



8. AlarmNet®



Easy Installation.  
Fast and Secure.

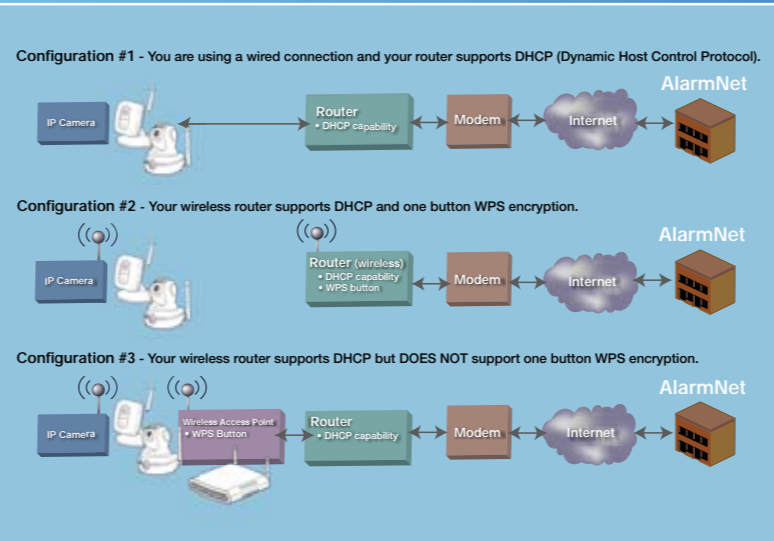


9. View Image



IPCAM Bandwidth Usage


360 x 240  
One Camera  
Stream  
768 Kbps  
(one min. average)

768 Kbps upload recommended minimal speed.




360 x 240  
Three Camera  
Streams  
2.3 Mbps  
(one min. average)

2.3 Mbps upload recommended minimal speed.



360 x 240  
Six Camera  
Streams  
4.6 Mbps  
(one min. average)

4.6 Mbps upload recommended minimal speed.



More Revenue Opportunities

- Lets end-users check up on kids, nannies, babysitters, pets, elderly relatives, employees and service people
- Alerts and video look-in on PC and mobile devices
- Real time, stored and portable video
- Multiple locations
- Intuitive easy-to-use interface (no training required)

Faster, Easier Installation

- Once powered and connected, the IP communicator automatically seeks the AlarmNet servers in a private, secure and authenticated connection
- Port 443 is typically available for outbound secure Internet access
- No prior installation knowledge about encryption keys, network protocol, firewalls or other computer networking is required

Security



- Unlike alternative solutions, Honeywell Total Connect does not compromise security of the customer's router
- Alternative solutions require installer to open IP server ports